


SINGLE DIRECTION VIBRATORY PLATES
BVP 10/36, BVP 18/45

PERFORMANCE DATA

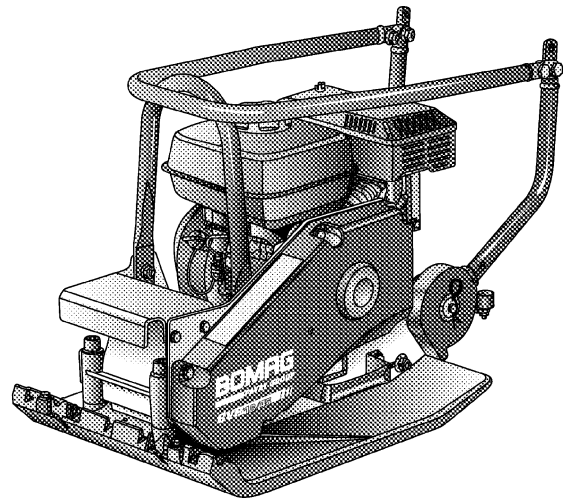

Machine type	Compaction output (m ³ /h) at recommended soil layer thicknesses		
	Gravel, sand	Mixed soil	Silt, clay
BVP 10/36	11-16	11-16	
BVP 18/45	17-23	14-20	

Machine type	Compaction output (t/h) at different asphalt layer thicknesses		
	2-4 cm	6-8 cm	10-14 cm
BVP 10/36	4-8	10-13	
BVP 18/45	5-10	11-15	

Technical Data


Shipping dimensions in m3

BVP 10/36

BVP 18/45

0,250

0,255

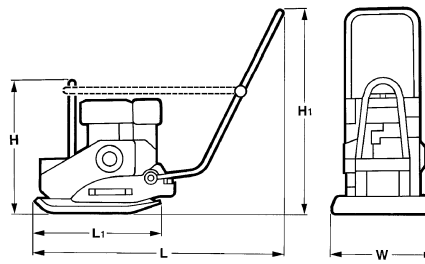

Standard Equipment

- Vibration insulated steering bow, foldable
- Detachable steering handle
- Highly wear resistant base plate
- Automatic shutdown at low oil level
- Recoil starter
- Single point lifting device
- Fully protected V-belt
- Carrying handles
- 3-2-1 Warranty

Optional Equipment

- Sprinkler system (+10kg)
- Transport wheels (+4kg)
- Plastic mat
- Tool kit
- Service Kit

Dimensions in mm

	H	H1	L	L1	W
BVP 10/36	535	915	1115	558	360
BVP 18/45	535	915	1115	558	450

Technical Data

Weights

Operating weight CECE	kg	83	91
Basic weight	kg	82	90

Dimensions

Working width	mm	360	450
---------------------	----	-----	-----

Driving Characteristics

Working speed, max.	m/min	25	25
Max. gradeability (depending on soil con	%	30	30

Drive

Engine manufacturer	Honda	Honda	
Type	GX 120	GX 160	
Emission stage	CARB Phase III	CARB Phase III	
Cooling	air	air	
Number of cylinders	1	1	
Performance SAE J 1349	kW	2,6	3,6
Speed	min-1	3.600	3.600
Drive system	mech.	mech.	
Fuel	gasoline	gasoline	
Fuel comsump. aver. during operation	l/h	0,9	1,1

Exciter system

Frequency	Hz	90	90
Centrifugal force	kN	10	18
Amplitude	mm	0,89	1,24

Capacities

Fuel	l	2,5	3,1
Water	l	7,0	7,0

Technical modifications reserved. Machines may be shown with options.



PRE 834 03 001

050314 Sa05

BOMAG
 Hellerwald
 D-56154 Boppard
 P.O. Box 5162
 Tel. (0)6742 - 1000
 Fax (0)6742 - 3090

