




E12

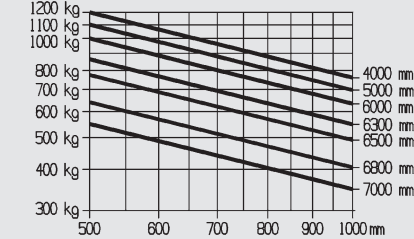


E15

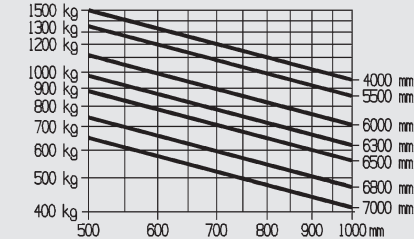


E16L/E16H

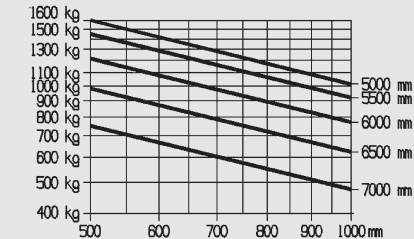


E20L

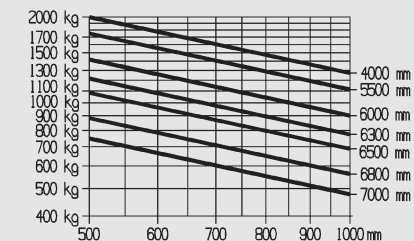


E14

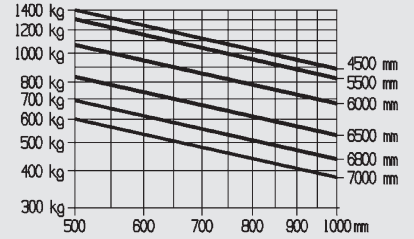

E16/E16C

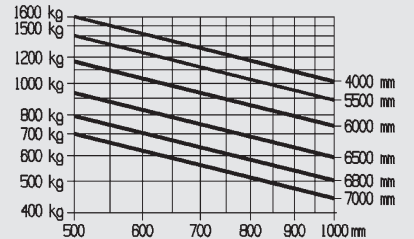

E18/E18L

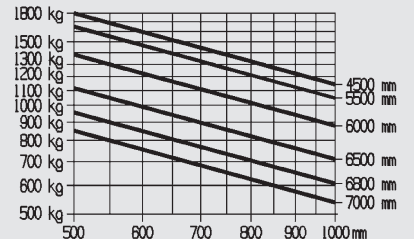

Standard Equipment/Optional Equipment

Standard Equipment

Linde twin drive pedals to control forward/reverse travel and braking

Original Linde Load Control integrated in armrest

Hydraulic suspended seat with extensive range of adjustment

Hydrostatic power steering

Three wheel configuration with original Linde center-pivot axle for excellent manoeuvrability

Linde compact drive axle with maintenance free oil-bath disc brake

Famous Linde dual motor drive with 2 x 4,6 kW for 48 V models and 2 x 3,5 kW for the 24 V models

11 kW (48 V) maintenance free AC lift motor, 10 kW for 24 V models

Curve Assist for automatic, proportional speed adaption

Plenty of storage space for writing utensils, beverage cans ...

Anti-glare display with clock, hour meter, service information and accurate battery condition indicator

Standard truck fits into ISO container

Superelastic tyres

Battery capacity for low version (h₆ = 1970 mm):

E16P = 48 V/575 Ah, E20PL = 48 V/690 Ah

Battery capacity for high version with increased battery capacity (h₆ = 2130 mm):

E16PH = 48 V/700 Ah, E18PH = 48 V/700 Ah

E20PH = 48 V/700 Ah, E20PHL = 48 V/840 Ah

New STANDARD features for the EVO models:

New seat/armrest generation for outstanding ergonomics

Improved energy consumption

Enhanced tractive force and climbing ability

Self-activating parking brake

Individual drive dynamic mode providing perfect combination of performance and efficiency

Showing battery operating time by the minute

Dust and dirt protected Linde Load Control

Enlarged step-in for high models

New diagnostic plug for fast service access

Sensitive traction control for Linde dual motor drive

Optional Equipment

Single drive pedal with direction selector on armrest

Overhead guard can be upgraded to full cabin with roof, front-, rear screens and doors (also available with tinted glass)

Wiper-washers for front, rear and roof screens

Further seats with additional comfort and adjustments

Cab heater with integrated pollen filter

Radio with speakers

Sun screen, clipboard and interior light

Standard mast lifts up to 5650 mm

Duplex mast (full free lift) lifts up to 4145 mm

Triplex mast (full free lift) lifts up to 6075 mm

Single or double additional hydraulics for all mast types

Tilt cylinder- and roof protection

Integrated sideshift

Integrated fork positioner

Mirrors

Linde original Blue Spot

Road traffic specification

Load backrest

Swivelseat

12 V socket

Truck lighting, working lamps

Cold store protection

Custom paintwork

Linde Fleet Management (LFM)

Active ventilation while charging

Linde energy management

Customized horizontal and vertical battery change incl. NEW hydraulic battery shift

Built-in high frequency onboard charger for convenience and flexibility

Recirculation of electrolyte

Other options available on request



Electric Counterbalanced Trucks Capacity 1200 - 2000 kg

E12 *EVO*®, E14 *EVO*®, E15 *EVO*®

E16 *EVO*®, E18 *EVO*®, E20 *EVO*®

386_02

Features

Linde clearview mast design

- With top mounted tilt cylinders for seamless load control and stability
- Excellent view of load and surroundings through the robust yet slim mast profiles
- Nominal capacity retained to maximum lift heights
- High residual capacities in all applications
- Exceptionally stable



Linde hydrostatic power steering

- Minimal physical demands on the operator
- Compact ergonomically designed steering wheel
- Linde close coupled steer axle for outstanding manoeuvrability
- Less tyre stress

Linde twin accelerator control

- Seamless, rapid reversing without repositioning the feet
- Short pedal travel
- Fatigue-free working
- Increased throughput and performance

Linde Load Control

- Small tactile joystick integrated in an adjustable armrest
- Precise and effortless fingertip joystick control of all mast functions
- Safe and highly efficient load handling


Linde Dual Motor Drive

- Two powerful AC drive motors
- Seamless acceleration and variable torque characteristics
- Power moduls in DCB-technology for high performance and efficiency cooling



Linde operator's compartment

- Ergonomically designed for efficient, fatigue-free working
- Spacious operator's compartment with generous floor plate area
- Cushioned comfort – mast and drive axle are isolated from the chassis and cab by a unique resilient suspension system that absorbs shock loadings

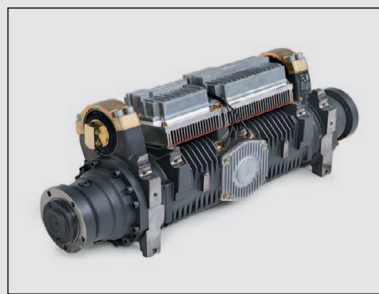


Linde compact drive axle

- Twin drive design with high performance Linde AC technology
- Integrated AC lift motor
- Optimum energy efficiency
- Maintenance-free oil-bath disc brake
- Efficient power moduls housed in sealed unit for complete protection
- Short, energy saving power connections



Linde energy management

- Optimised energy consumption
- Accurate battery condition indicator
- Simple horizontal or vertical battery changing options
- Optional built-in high frequency charger for convenience and flexibility
- Record of battery usage



Technical Data according to VDI 2198

Characteristics	1.1	Manufacturer		LINDE	LINDE	LINDE	LINDE	LINDE	LINDE	LINDE	LINDE	LINDE	LINDE
	1.2	Model designation		E12 (575Ah)	E15 (920Ah)	E14 (460Ah)	E16C (460Ah)	E16 (575Ah)	E16L (690Ah)	E16H (700Ah)	E18 (575Ah)	E18L (690Ah)	E20L (690Ah)
	1.2a	Series		386-02	386-02	386-02	386-02	386-02	386-02	386-02	386-02	386-02	386-02
	1.3	Power unit		Battery	Battery	Battery	Battery	Battery	Battery	Battery	Battery	Battery	Battery
	1.4	Operation		Seat	Seat	Seat	Seat	Seat	Seat	Seat	Seat	Seat	Seat
	1.5	Load capacity	Q (t)	1.2	1.5	1.4	1.6	1.6	1.6	1.6	1.8	1.8	2.0
	1.6	Load centre	c (mm)	500	500	500	500	500	500	500	500	500	500
	1.8	Axle centre to fork face	x (mm)	365	365	365	365	365	365	365	370	370	374
	1.9	Wheelbase	y (mm)	1156 ¹⁾	1301 ¹⁾	1301 ¹⁾	1301 ¹⁾	1409 ¹⁾	1517 ¹⁾	1461 ¹⁾	1409 ¹⁾	1517 ¹⁾	1517 ¹⁾
Weights	2.1	Service weight	(kg)	2805 ²⁾	2985 ²⁾	2890 ²⁾	3095 ²⁾	3060 ²⁾	3075 ²⁾	3340 ²⁾	3295 ²⁾	3270 ²⁾	3335 ²⁾
	2.2	Axle load with load, front/rear	(kg)	3458 / 547	3912 / 573	3766 / 524	4099 / 596	4097 / 563	4112 / 563	4202 / 738	4466 / 629	4472 / 598	4787 / 548
	2.3	Axle load without load, front/rear	(kg)	1360 / 1445 ²⁾	1415 / 1570 ²⁾	1435 / 1455 ²⁾	1435 / 1660 ²⁾	1515 / 1545 ²⁾	1600 / 1475 ²⁾	1655 / 1685 ²⁾	1555 / 1740 ²⁾	1640 / 1630 ²⁾	1635 / 1700 ²⁾
	3.1	Tyres rubber, SE, pneumatic, polyurethane		SE	SE	SE	SE	SE	SE	SE	SE	SE	SE
	3.2	Tyre size, front		180/70-8 (18x7-8)	180/70-8 (18x7-8)	180/70-8 (18x7-8)	180/70-8 (18x7-8)	180/70-8 (18x7-8)	180/70-8 (18x7-8)	180/70-8 (18x7-8)	200/50-10	200/50-10	200/50-10
	3.3	Tyre size, rear		15x4 1/2-8	15x4 1/2-8	15x4 1/2-8	15x4 1/2-8	15x4 1/2-8	15x4 1/2-8	15x4 1/2-8	140/55-9	140/55-9	140/55-9
	3.5	Wheels, number front/rear (x = driven)		2x / 2	2x / 2	2x / 2	2x / 2	2x / 2	2x / 2	2x / 2	2x / 2	2x / 2	2x / 2
	3.6	Track width, front	b10 (mm)	930	930	930	930	930	930	930	965	965	965
	3.7	Track width, rear	b11 (mm)	168	168	168	168	168	168	172	172	172	172
Dimensions	4.1	Mast/fork carriage tilt, forward/backward	a/b (°)	5.0 / 7.0	5.0 / 7.0	5.0 / 7.0	5.0 / 7.0	5.0 / 7.0	5.0 / 7.0	5.0 / 7.0	5.0 / 7.0	5.0 / 7.0	5.0 / 7.0
	4.2	Height of mast, lowered	h1 (mm)	2019	2019	2019	2019	2019	2019	2194	2019	2019	2019
	4.3	Free lift	h2 (mm)	150	150	150	150	150	150	150	150	150	150
	4.4	Lift	h3 (mm)	2800	2800	2800	2800	2800	2800	3150	2800	2800	2800
	4.5	Height of mast, extended	h4 (mm)	3401	3401	3401	3401	3401	3401	3751	3401	3401	3401
	4.7	Height of overhead guard (cabin)	h6 (mm)	1970	1970	1970	1970	1970	1970	2130	1970	1970	1970
	4.8	Height of seat/stand on platform	h7 (mm)	908	908	908	908	908	908	1065	908	908	908
	4.12	Towing coupling height	h10 (mm)	510	510	510	510	510	510	594	510	510	510
	4.19	Overall length	l1 (mm)	2601	2746	2746	2766	2854	2962	2906	2879	2967	2971
	4.20	Length to fork face	l2 (mm)	1701	1846	1846	1866	1954	2062	2006	1979	2067	2071
	4.21	Overall width	b1/b2 (mm)	1090 / 1050	1090 / 1050	1090 / 1050	1090 / 1050	1090 / 1050	1090 / 1050	1090 / 1050	1172 / 1050	1172 / 1050	1172 / 1050
	4.22	Fork dimensions	s/e/l (mm)	40 x 80 x 900	40 x 80 x 900	40 x 80 x 900	40 x 80 x 900	40 x 80 x 900	40 x 80 x 900	40 x 80 x 900	45 x 100 x 900	45 x 100 x 900	45 x 100 x 900
	4.23	Fork carriage to ISO 2328, class/type A, B		2A	2A	2A	2A	2A	2A	2A	2A	2A	2A
	4.24	Width of fork carriage	b3 (mm)	980	980	980	980	980	980	980	980	980	980
	4.31	Ground clearance, below mast	m1 (mm)	89	89	89	89	92	97	97	97	97	97
	4.32	Ground clearance, centre of wheelbase	m2 (mm)	96	96	96	96	96	96	96	96	96	96
	4.33	Aisle width with pallet 1000 x 1200 across forks	Ast (mm)	3040 ³⁾	3177 ³⁾	3177 ³⁾	3196 ³⁾	3281 ³⁾	3389 ³⁾	3332 ³⁾	3305 ³⁾	3394 ³⁾	3397 ³⁾
	4.34	Aisle width with pallet 800 x 1200 along forks	Ast (mm)	3164 ³⁾	3301 ³⁾	3301 ³⁾	3320 ³⁾	3405 ³⁾	3513 ³⁾	3456 ³⁾	3429 ³⁾	3518 ³⁾	3522 ³⁾
	4.35	Turning radius	Wa (mm)	1349	1486	1486	1505	1590	1698	1641	1609	1698	1698
	4.36	Minimum pivoting point distance	b13 (mm)	0	0	0	0	0	0	0	0	0	0
Performance	5.1	Travel speed, with/without load	(km/h)	12.5 / 13.5	12.5 / 13.5	16 / 16	16 / 16	16 / 16	16 / 16	16 / 16	16 / 16	16 / 16	16 / 16
	5.2	Lifting speed, with/without load	(m/s)	0.3 / 0.5	0.3 / 0.5	0.4 / 0.6	0.4 / 0.6	0.4 / 0.6	0.4 / 0.6	0.4 / 0.6	0.4 / 0.6	0.4 / 0.6	0.4 / 0.6
	5.3	Lowering speed, with/without load	(m/s)	0.58 / 0.47	0.58 / 0.47	0.58 / 0.47	0.58 / 0.47	0.6 / 0.55	0.58 / 0.47	0.58 / 0.47	0.58 / 0.47	0.58 / 0.47	0.58 / 0.47
	5.5	Tractive force, with/without load	(N)	2400 / 2400	2400 / 2400	2300 / 2300	2300 / 2300	2300 / 2300	2300 / 2300	2300 / 2300	2300 / 2300	2300 / 2300	2300 / 2300
	5.6	Maximum tractive force, with/without load	(N)	7500 / 7500	7500 / 7500	11000 / 11000	11000 / 11000	11000 / 11000	11000 / 11000	11000 / 11000	11000 / 11000	11000 / 11000	11000 / 11000
	5.7	Climbing ability, with/without load	(%)	7.7 / 11.4	7.1 / 10.9	7.3 / 11.0	6.7 / 10.3	6.8 / 10.4	6.8 / 10.4	6.6 / 9.9	6.2 / 9.6	6.2 / 9.6	6.2 / 9.7
	5.8	Maximum climbing ability, with/without load	(%)	19.4 / 28.3	17.3 / 26.5	27.1 / 42.1	24.6 / 38.9	24.8 / 39.4	24.7 / 39.2	23.3 / 35.6	22.6 / 36.2	22.7 / 36.5	21.5 / 35.7
	5.9	Acceleration time, with/without load	(s)	5.8 / 5.0	5.8 / 5.0	4.5 / 3.8	4.5 / 3.8	4.5 / 3.8	4.5 / 3.8	4.5 / 3.8	4.5 / 3.8	4.5 / 3.8	4.5 / 3.8
	5.10	Service brake		hydr./mech.	hydr./mech.	hydr./mech.	hydr./mech.	hydr./mech.	hydr./mech.	hydr./mech.	hydr./mech.	hydr./mech.	hydr./mech.
	Drive	6.1	Drive motor, 60 minute rating	(kW)	2x 3.5	2x 3.5	2x 4.6	2x 4.6	2x 4.6	2x 4.6	2x 4.6	2x 4.6	2x 5
6.2		Lift motor, rating at S3 15%	(kW)	5	5	10	10	10	10	10	10	10	11
6.3		Battery according to DIN 43531/35/36 A,B,C,no		43 535 / A	43 535 / A	43 531 / A	43 531 / A	43 531 / A	43 531 / A	43 531 / A	43 531 / A	43 531 / A	43 531 / A
6.4		Battery voltage/rated capacity (5h)	(V/Ah)	24 / 575/625	24 / 920/1000	48 / 460/500	48 / 460/500	48 / 575/625	48 / 690/750	48 / 700/775	48 / 575/625	48 / 690/750	48 / 690/750
6.5		Battery weight (± 5%)	(kg)	445	676	708	708	856	1013	1118	856	1013	1013
6.6		Power consumption according to VDI cycle	(kWh/h)	3.9	3.9	4.4	4.6	4.6	4.7	4.8	4.8	5.1	5.3
Others	8.1	Type of drive control		Digital/stepless	Digital/stepless	Digital/stepless	Digital/stepless	Digital/stepless	Digital/stepless	Digital/stepless	Digital/stepless	Digital/stepless	Digital/stepless
	8.2	Operating pressure for attachments	(bar)	170	190	180	170	170	170	170	170	170	170
	8.3	Oil flow for attachments	(l/min)	32	32	32	32	32	32	32	32	32	32
	8.4	Noise level at operator's ear	(dB(A))	< 65	< 65	< 65	< 65	< 65	< 65	< 65	< 65	< 65	< 65

1) Mast in vertical position
2) Figures with battery, see line 6.4/6.5.
3) Including a 200 mm (min.) operating aisle clearance.

